




Alcatel·Lucent 
Enterprise

Technical
Specification



Asset Tag S18-3

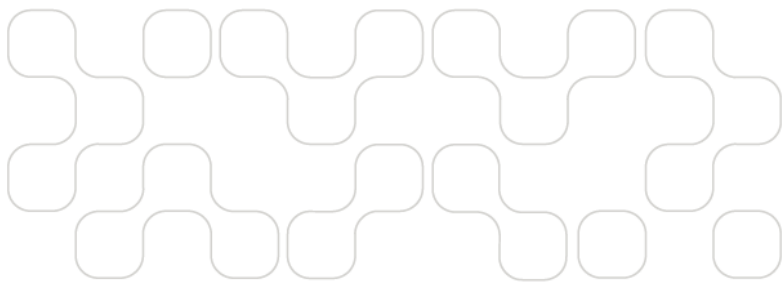


Dimensions	Height	43 mm (1.69 in)
	Width	43 mm (1.69 in)
	Depth	8 mm (0.31 in)
	Weight	19 g (0.67 oz)
Microcontroller		Nordic Semiconductor nRF52832
Connectivity	Bluetooth Range Available transmission power levels	Bluetooth 4.2 compliant, Bluetooth 5 compatible Up to 50 meters 1 (-20dBm), 2 (-16dBm), 3 (-12dBm), 4 (-8dBm), 5 (-4dBm), 6 (0dBm), 7 (4dBm)
	Sensitivity	-96dBm
Battery and Power	Model	CR2450
	Type	Lithium Manganese Dioxide Coin Battery
	Total Capacity	620mAh
	Replaceable	Yes
	Battery life (Tx=-12dBm, interval: 350ms)	Up to 15 months
Sensors		Temperature, Accelerometer
Functionalities		RTC, dataflash memory, panic button, soft on/off, LED
Casing	Material	ABS
	Colors	White
	Protection	IP-65
	Mounting	Two holes for a leash/strip
	Customization	Custom logo upon request
Environmental Requirements	Operating Temperature	-20°C / + 60°C (-4°F / +140°F)
	Humidity (non-condensing)	From 0% up to 95%
Beacon standards compatibility**	iBeacon	Yes
	Eddystone	Yes
	Kontakt.io Secure Profile	Yes
	Custom frames possible for large orders	Yes
Warranty		12 months
Certificates	CE (EU)	Yes
	FCC (USA)	Yes
	RoHS	Yes






* please contact sales

** All packets can be enabled and disabled at any time, except Kontakt.io Secure Profile (it's constantly broadcasted at a fixed 1000ms interval)


Get in Touch






 kontakt.io
Stoczniewców 3, 30-709
Kraków, Poland

 @kontakt_io
 facebook.com/kontakt.io
 kontakt-io
 +48 123 793 445
 kontakt@kontakt.io

Alcatel·Lucent 
Enterprise

 ALE International
32 avenue Kléber, 92700
Colombes, France
www.al-enterprise.com

 @ALUEnterprise
 facebook.com/ALUEnterprise
 alcateluententerprise